



FASSON® ESP 5126

Insulation Facing Tape


Closure system tape with ESP Foil and Polyethylene facing

FEATURES:

- For use with ESP 5126 pipe insulation
- Excellent adhesion and quick stick

BENEFITS:

- Excellent bond to ESP 5126 facestock
- Excellent initial tack and long-term adhesion
- Made in the USA

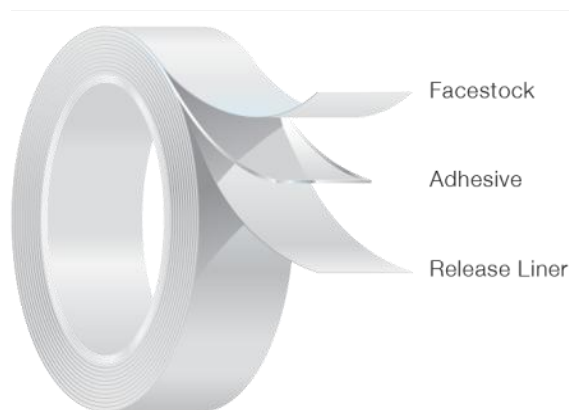

CONSTRUCTION:

Carrier:

Foil / Polyethylene

Adhesive:

Acrylic

Liner:

Densified Kraft

FASSON® ESP 5126

Adhesive Properties:		Typical Values	
Thickness	Test Method(s): PSTC-133	US Mils	MM's
Liner:		3.6	0.09
Adhesive:		1.2	0.03
Carrier:		2.0	0.05
Total Caliper:		6.8	0.17

PEEL ADHESION		Test Method(s): PSTC-101, ASTM D-3330, STD-10		
Product 180° 12" min				
Substrate		Lbf / In	US Oz / In	N / Meter
SS	Initial	3.5	56	613

LOOP TACK		Test Method(s): PSTC-16, STD-7		
Product 180° 20" / min				
Substrate		Lbf / In	US Oz / In	N / Meter
SS	Initial	6.0	96	1051

TLMI RELEASE		Test Method(s): PSTC-4, STD-8		
Product 90°				
Substrate		Gf / 2 In w		
	Initial 300" / min	25.0		

TEMPERATURES	° F	° C
Min Application Temp	0 ° F	-17 ° C
Max Continuous Operating Temp	200 ° F	93 ° C
Max Intermittent Operating Temp	250 ° F	121 ° C

THE LISTED VALUES ARE TYPICAL AND NOT INTENDED TO SERVE AS PRODUCT SPECIFICATIONS

APPLICATION TECHNIQUES

- It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied be clean, dry, and free of grease or oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (film / rigid) surface achieves different performance

STORAGE / SHELF LIFE

- One year when stored at 64-72°F (18-22°C) / 30-70% relative humidity, out of direct sunlight and in original packaging.

Please refer to Tapes.AveryDennison.com for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2013 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. Avery™ and all other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.

	Performance Tapes	Asia Pacific Kunshan, China, NO. 618 Nanhe Road Kunshan Economic & Technological Zone China, 215335 Phone: +86 512 57155001 Fax: +86 512 57155059	Europe Tieblokkenlaan 1 B-2300 Turnhout Belgium Phone: +32 (0)14 40 48 11 Fax: +32 (0)14 40 48 55	South America Rua Francisco Foga, 225 13280-000 Vinhedo SP Brazil Phone: +55 19 3876 7736 Fax: +55 19 3876 7682	North America 250 Chester Street Painesville, Ohio 44077 USA Phone: +1 866-462-8379 Fax: +1 888-358-4469
---	----------------------	--	--	--	---