

Isn't It Time Your Roofing Underlayment Did More?



Save Energy. Save \$\$\$\$. Do More. With Less. Period.



UNDER SHINGLES



UNDER CLAY TILE


- * Self Seals Around Fasteners
- * Creates a Thermal Break
- * Lowers Attic Temperature
- * Increases Energy Savings
- * Great For New Or Re-Roofing
- * TDI, CA & FL Approved
- * Excellent Vapor Barrier
- * Built In Overlap Means Full Five Square Coverage
- * For Use Under Shingles, Metal Roof, Clay Tile & More



UNDER METAL



UNDER STONE COATED STEEL

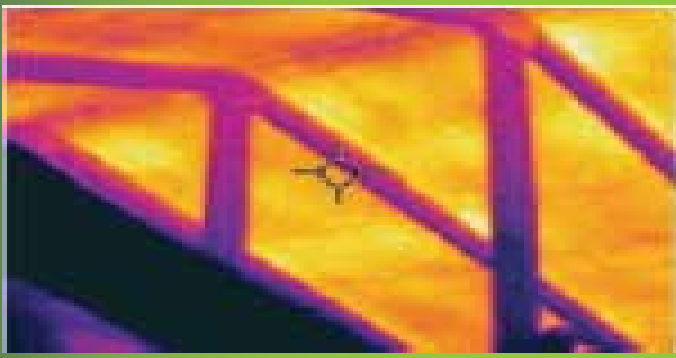

Thermal imaging of an attic without ThermaSheet® roofing underlayment. Temperature is 129°



Thermal imaging of the same attic WITH ThermaSheet® roofing underlayment. Temperature is 98°

LOW-E THERMASHEET® FEATURES & SPECIFICATIONS

PRODUCT CODES: 4LMPX (1/8" nominal thickness), 4LFPX (7/32" nominal thickness)

PRODUCT DIMENSIONS & DESCRIPTION: Double sided scrimmed aluminum foil laminated to polyethylene foam

WIDTH: 4' (with a 4" overlapping flange)

LENGTH: 125'

R-VALUE: Under shingles - 4LMPX 0.5, 4LFPX 1.03

R-VALUE*: R-6.4 downward heat flow only (with 1.5" airspace)

PERM RATING: ASTM E96 0.008

EMITTANCE: ASTM C1371 0.03

*System R-Value for this installation method was calculated using data from the Ashrae Handbook of Fundamentals.



Discover Even More Ways To Lower Energy Costs With ESP Low-E® Insulation



For more information please visit our website at www.low-e.com
or call 1-800-BUY-LOWE (800-289-5693)